


MOLDED

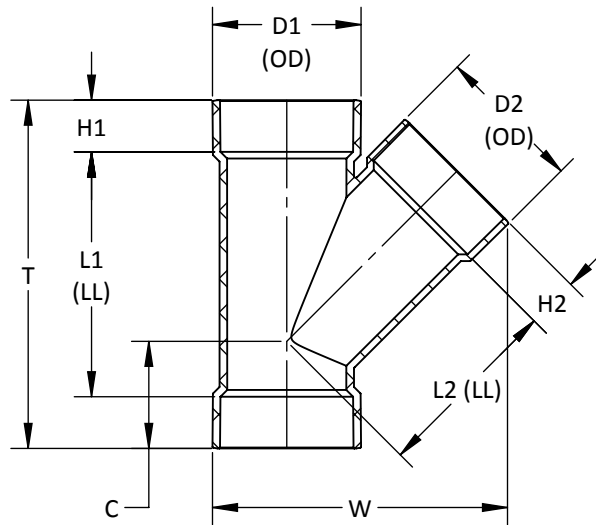

ASTM D2665, F1866, CSA B181.2 WHERE APPLICABLE

**45 DEGREE WYE HxHxH
PVC SOLVENT WELD DWV**

PART NO.	SIZE IN INCHES	L1	L2	H1	H2	C	T	W	D1	D2
* D304	4 x 4	8 1/4	6	1 25/32	1 25/32	3 5/8	11 13/16	10 1/32	5 1/32	5 1/32
* D306-4	6 x 4	6 3/4	7 1/8	3 1/16	1 25/32	3 3/16	12 7/8	11 29/32	7 7/32	5 1/32
* D306	6 x 6	10 1/16	8 3/8	3 1/16	3 1/16	4 3/4	16 3/16	14 7/32	7 7/32	7 7/32
* D308-4	8 x 4	6 13/16	7 7/8	4 1/16	1 25/32	3 1/4	14 15/16	13 7/8	9 11/32	5 1/32
* D308-6	8 x 6	8 31/32	9	4 1/16	3 1/16	4 19/32	17 3/32	15 11/16	9 11/32	7 7/32
* D308	8 x 8	14 3/16	12 1/8	4 1/16	4 1/16	6 1/2	22 5/16	19 3/16	9 11/32	9 11/32
* D3010-4	10 x 4	6 7/8	9	5 1/16	1 25/32	3 3/8	17	16 3/16	11 17/32	5 1/32
* D3010-6	10 x 6	9 3/4	11 1/4	5 1/16	3 1/16	5	19 7/8	18 5/8	11 17/32	7 7/32
* D3010-8	10 x 8	12 7/16	12 7/16	5 1/16	4 1/16	6 1/16	22 9/16	20 11/16	11 17/32	9 11/32
* D3010	10 x 10	15 3/8	14	5 1/16	5 1/16	7 15/32	25 1/2	22 7/8	11 17/32	11 17/32
* D3012-4	12 x 4	7	11	6 1/16	1 25/32	3 11/32	19 1/8	18 3/16	13 19/32	5 1/32
* D3012-6	12 x 6	9 13/16	11 3/8	6 1/16	3 1/16	4 13/16	21 15/16	20 5/8	13 19/32	7 7/32
* D3012-8	12 x 8	12 5/8	12 5/8	6 1/16	4 1/16	6 5/32	24 3/4	22 -3/4	13 19/32	9 11/32
* D3012-10	12 x 10	15 7/16	14 1/2	6 1/16	5 1/16	7 19/32	27 9/16	25	13 19/32	11 17/32
* D3012	12 x 12	18 1/4	15 1/4	6 1/16	6 1/16	9 1/2	30 3/8	27 1/32	13 19/32	13 19/32

-- DIMENSIONS AND APPEARANCE ARE APPROXIMATE AND SUBJECT TO CHANGE
WITHOUT NOTICE DUE TO DESIGN OR PRODUCTION MODIFICATIONS
-- MOLDED FITTING TOLERANCE = ±1/8" OVERALL LENGTH
-- FABRICATED FITTING TOLERANCE = ±1" LINEAR, ± 2° ANGULAR

* MOLDED FITTING
† ASSEMBLED FROM MOLDED COMPONENTS
ALL OTHER FITTINGS ARE FABRICATED