


MOLDED

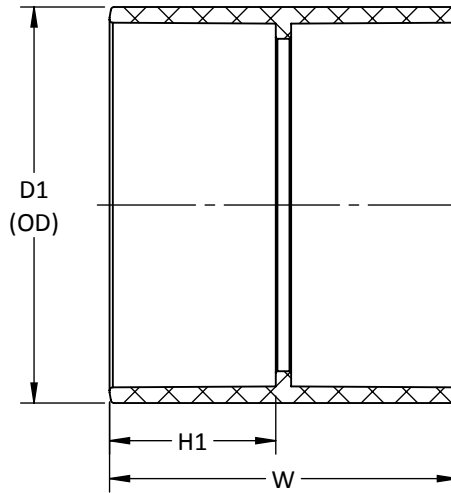

ASTM D2665, F1866, F2135, CSA B181.2 WHERE APPLICABLE

**STOP COUPLING HxH
PVC SOLVENT WELD DWV**

PART NO.	SIZE IN INCHES	H1	W	D1
* D604	4	1 25/32	3 13/16	5 1/32
* D606	6	3 1/16	6 11/32	7 7/32
* D608	8	4 1/16	8 5/16	9 11/32
* D6010	10	5 1/16	10 11/16	11 17/32
* D6012	12	6 1/16	12 29/32	13 19/32

-- DIMENSIONS AND APPEARANCE ARE APPROXIMATE AND SUBJECT TO CHANGE
WITHOUT NOTICE DUE TO DESIGN OR PRODUCTION MODIFICATIONS
-- MOLDED FITTING TOLERANCE = ±1/8" OVERALL LENGTH
-- FABRICATED FITTING TOLERANCE = ±1" LINEAR, ± 2° ANGULAR

* MOLDED FITTING
† ASSEMBLED FROM MOLDED COMPONENTS
ALL OTHER FITTINGS ARE FABRICATED