



TECHNICAL SPECIFICATION

PVC Electrical Duct 4" Modular NAPBLOC Spacers


SCOPE

This specification covers the requirements for Modular NAPBLOC duct spacers. These spacers are designed for 4" duct which meets the Canadian Standards Association (CSA) standard C22.2 No. 211.1


MATERIALS

The spacers are manufactured from black corrosion-resistant polypropylene

SPACER DIMENSIONS

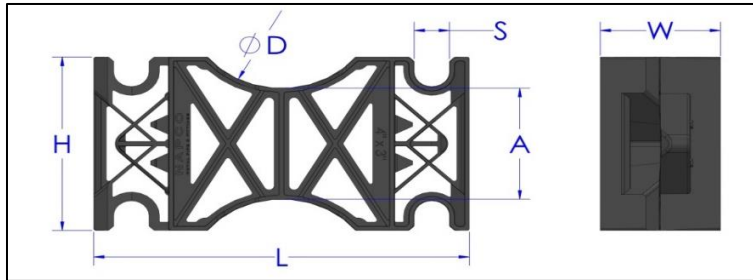

Modular NAPBLOC Dimensions, in.						
Size	D Diameter	A Vertical Wall to Wall Spacing	H Height	L Length	S Rebar Slot Width	W Width at Ends
4 x 3	4.6	3.3	5.2	9.4	7/8	3.0
4 x 1.5	4.6	1.7	3.6	7.8	7/8	3.0

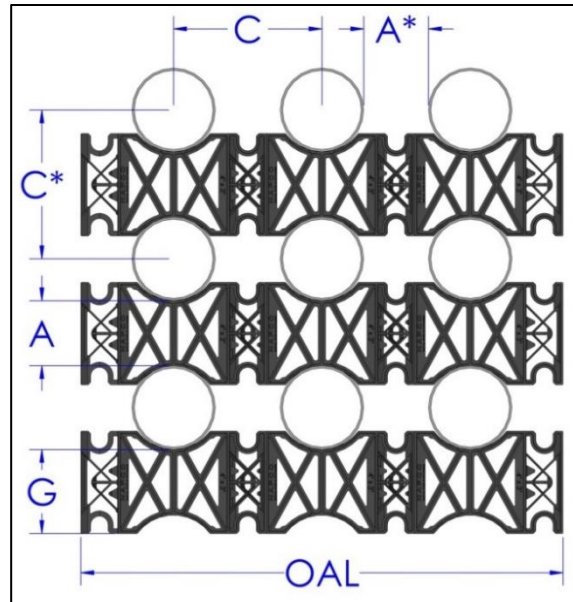

Assembled Modular NAPBLOC Dimensions, in.							
Size	A* Wall to Wall Spacing	C* Center to Center Spacing	G Ground Clearance	OAL Overall Length			
				1-way	2-way	3-way	4-way
4 x 3	3.3 (84mm)	7.5 (190mm)	4.2	9.4	16.9	24.4	31.9
4 x 1.5	1.7 (44mm)	5.9 (150mm)	2.6	7.8	13.7	19.7	25.6

*Dimension calculated using 4" DB2/ES2 duct (4.216" diameter) where applicable

Available Configurations	
Part Number	Description
DMB4151531NG	4" x 1 ½" x 1 ½" x 3" – 1 Way Modular NAPBLOC Duct Spacer
DMB4151532NG	4" x 1 ½" x 1 ½" x 3" – 2 Way Modular NAPBLOC Duct Spacer
DMB4151533NG	4" x 1 ½" x 1 ½" x 3" – 3 Way Modular NAPBLOC Duct Spacer
DMB4151534NG	4" x 1 ½" x 1 ½" x 3" – 4 Way Modular NAPBLOC Duct Spacer
DMB43331NG	4" x 3" x 3" x 3" – 1 Way Modular NAPBLOC Duct Spacer
DMB43332NG	4" x 3" x 3" x 3" – 2 Way Modular NAPBLOC Duct Spacer
DMB43333NG	4" x 3" x 3" x 3" – 3 Way Modular NAPBLOC Duct Spacer
DMB43334NG	4" x 3" x 3" x 3" – 4 Way Modular NAPBLOC Duct Spacer

Note: all dimensions shown are approximate and are subject to manufacturing tolerances.